



CAVALIER INDUSTRIES LTD.

FACTORY-DIRECT | FRONT-LINE SUPPORT | Service you can count on.

PROFESSIONAL EQUIPMENT QUALITY SUPPORT LOCAL SERVICE

SUBMERSIBLE PUMPS

HIGH PERFORMANCE
SUPERIOR DESIGN.



SITE CLIMATE CONTROL

YEAR ROUND
OPPORTUNITY.



SITE SUPPORT EQUIPMENT

DRIVE PRODUCTIVITY ON
THE JOB SITE



PROFESSIONAL EQUIPMENT QUALITY SUPPORT LOCAL SERVICE

TABLE OF CONTENTS

Allmand Brothers Inc - Light, Power, Heat	04	Hybrid Lifts by Custom Equipment	25
ATP - Air Tooling	06	Kut-Rite - Concrete Preparation	26
APT - American Pneumatic Tools	08	Mi-T-M - Pressure Washers, Compressors	28
BN Rebar Tools	09	Pramac - Power Generation	30
Bosch Power Tools	10	Quest - Construction Site Air Quality	32
BJM Pumps - Submersible Pumps	12	NTI Global - Ducting	34
Brunner & Lay Tooling	14	Safety Heat - Flameless Heaters	35
Buhin Corporation - Ventilation Equipment	15	Solar Tech - Traffic Control Equipment	36
Broadfence - Temporary Fencing	16	Spectra Precision Laser	38
CCI Industries - Power Cables and Distribution	16	Sullivan Palatek - Air Compressors	40
Campo Equipment - Indirect Heaters	17	Serious Thermal - Utility Thawing	42
Chem Masters - Concrete Supplies	18	Toro - Utility, Compaction, Concrete	43
DMI Light Towers - Stadium Light Towers	20	TOKU America - Hydraulic Hammers	46
HELI Forklifts	21	Wylie - Water Trailers	46
Guardian Tank - Portable Fuel Tanks	22		
Miller Welders	23		
Myers Seth - Pumps	24		

QUICKSHIP PROGRAM

- Local inventory
- Stocked in Western, and Eastern Canada
- 2-3 day delivery on in stock items anywhere in Canada



PREPARED TO SERVE

With regional offices and warehousing in Edmonton, Alberta and Exeter, Ontario we can react quickly to local, demanding business environments.



GUIDE TO CHOOSING THE RIGHT PARTNER

WHERE WE CAME FROM

Established in 1991 by Jim Johnson as Cavalier Industries Ltd. From our origins as a equipment accessories company, we've since grown into a full-service sales, marketing, and distribution company for many of the leading brands in the industry, covering multiple markets.



FACTORY DIRECT

We at Cavalier Industries Ltd are dedicated to establishing strong business relationships with our customers and suppliers, with a proven track record of helping both grow their business in Canada. We're in the business of growing businesses.



DEMAND SUPPORT

As far as we're concerned, we haven't done our job until you've banked the profit you've made selling our products, and ensured repeat business from your customers in the process. If you don't have customers asking for our products, don't know how to use or sell those products, or don't know how to integrate them into an application, making a profitable sale is that much tougher. And if you don't have access to dependable post-sales service and technical support, it's that much more difficult and expensive to service your customers and secure their repeat business.



OUR SERVICES

We combine four separate services to create a support network to drive business for both our vendors, and customers.

Agency

The core of our factory-direct model, invoiced and shipped direct.

Parts Distribution

The fact is, even the best products break down. You'll be glad parts are in stock, in Canada, when you need them.

Wholesale Distribution

Combing all the accessories to provide a full solution can be a challenge. We pride ourselves on providing turn key solutions.

Marketing

Helping customers market our products, and driving end users to our dealer base create a profitable business model, for all stakeholders

Allmand™

SITE SUPPORT EQUIPMENT

www.allmand.com

JOB SITE HEAT, LIGHT, AND POWER HELP CREATE SAFER,

MORE PRODUCTIVE JOB SITES

Since 1938, Allmand Brothers Inc, located in Holdrege, Nebraska, has designed and manufactured a range of premium site support products.

Upon the introduction of the industries first portable light tower solution in 1954, we have constantly strived to understand customer requirements, and set the bar for performance and safety.


SHO-HD lighting system creates the brightest, whitest light system on the market today

V-Series light tower: unparalleled safety, and operating efficiency.



V-SERIES & SHO-HD

BRIGHTER, WHITER,
SAFER JOB SITES

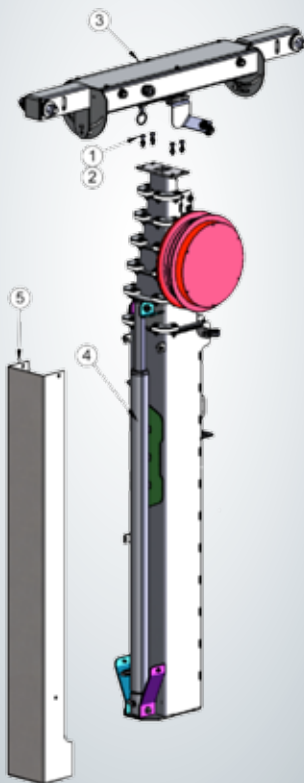

COMPETITIVE ADVANTAGE

Performance is the name of the game.

- **BRIGHTER LIGHT:** The SHO-HD 1250 watt parallel lamp outshines the competition with a powerful 150,000 lumens per fixture
- **BETTER COLOUR:** Enhanced Safety & Productivity. SHO-HD provides whiter light for greatly enhanced visibility and a safer, more productive work environment
- **MORE COVERAGE:** 31% More Area Lighted. SHO-HD 1250 watt lamp illuminates up to 52,000 square feet of surface area to 0.5 foot candle or brighter
- **Switch operation** - no pins, locks automatically in any position. Operator can 'Look up and Live', out of harms way during raise/lower procedure
- **Increased operational efficiency,** 20 seconds up or down
- **No hassle setup** - time greatly reduced, more flexibility
- **Toggle switch operation** at rear of tower
- **No pins or position lock** on tower
- **No winches** to maintain, cable stretching and flat spots are reduced

DESIGNED FOR YOUR MARKET

We design products to excel in applications and industry - from oil and gas to urban lighting solutions we have a product configuration to meet your requirement.

- **Proven reliability** in the field - even in the harshest applications
- **Light quality** plays a role in workplace health, safety, productivity, and morale. Improving overall light quality can improve hazard identification, enhance overall mental alertness, reduce eye strain - and improve operational efficiency.

GUIDE TO CHOOSING THE RIGHT PRODUCTS

NL - NIGHT LIGHT SERIES - V SERIES OR LAYDOWN

Narrow Body compact design, 12 lay-down, 16 V-series units per truckload, small footprint with big light output

Engine Options kubota, cat, or kohler diesel

Power Options 7.5kW or 8kW generator options



ML - MAXI LIGHT SERIES - V SERIES OR LAYDOWN

Wide Body large fuel capacity, and longer run times with a 386 litre, 102 gallon tank: Kubota 8kW w/ lights Only: 204 hour run time, 100% load: 170 hour run time. Isuzu 20kW w/ lights only: 164 hours, 100% load: 56 hours

More Power Options available in 7.5kW, 8kW, 15kW, and 20kW configuration

Oil and Gas product designed for extreme durability, constant up-time



ALLMAND SPEC UNITS - MINE & RIG SPEC - V SERIES

Rig and Mine Spec configuration provide a turn key solution that provide light towers configured with an option set tailored to meet demanding light and safety requirements of industrial work sites within the energy and mining industries.

Mine & Rig Spec are available in the 6 lamp - 910,000 lumen light tower configuration to provide the ideal work site solutions.



PAL1250W2

- Single Lamp, 10' telescoping tower, self storing portable light - 120v - 10 amps

PAL2500W4

- Dual Lamp, 12' telescoping tower, self storing portable light - 120v - 20 amps



PAL4000 SHED LIGHT

- Bolt on light tower system for portable or permanent buildings - SHO-HD Lighting

- Includes: Bolt on tower, ballast box, and inside lamp storage bar

- 230v, 30 amp power requirement



MAXI-HEAT MH-1000

- 1,000,000 BTU site support heater
- Self contained design: on-board fuel tank, generator, and optional duct storage box
- Cat or Isuzu Engine Option
- Transport Canada and CSA Approved
- Extreme cold weather performance, proven track record in Canada
- Integrated GE Gas Detection System is available as an option for hazardous locations



TOOLS TO DRIVE REVENUE

ATP

A DIVISION OF HY-TECH MACHINE, INC.

www.atponline.com

IMPACT WRENCHES

World's Most Extensive Line of Super Duty Impact Tools

- Torque ranges from 250 FT LBS to 80,000 FT LBS
- Specialty Impact designs (Zamac, UNA DRV®, Extended anvils, Right angle, Custom)
- Parts interchangeable with many Ingersoll-Rand, Chicago Pneumatic, Sioux Tools, Universal Tool and Cleco Impact wrenches



ABRASIVE TOOLS

Die Grinders 1/2 HP & 1 HP models available, speeds up to 25,000 RPM

Angle Grinders 3" and 4" wheel

Vertical and Horizontal Industrial Duty Grinders 3 HP & 4 HP models available, Speeds from 3,000 to 9,000 RPM, Wheel Capacity (7" & 9" Type 27, Type 28, 6" Cup, Wire Brush, 6" & 8" Straight Wheel, Cone)



AIR DRILLS

ATP2122 Series - 2HP

Available in 230, 280, 350, 500, 725, 1025, and 1500 RPM
Wood bore chuck, 1/2"

ATP3500 Series - 5.9 HP 60 & 100 RPM standard, #5 Morse taper



AIR MOTORS

ATP Air Motors 0.58 HP up to 7 HP motors available: speeds from 95 RPM up to 25,000 RPM, no inherent shock hazard, Allows for many starts and stalls without harming the motor, can be mounted in any position without effecting performance, custom designs and shaft sizes available.



SUMP PUMPS

ATP portable, air operated

2" Discharge

Moves up to 216 GPM



PROFESSIONAL AIR

ATP
A DIVISION OF HY-TECH MACHINE, INC.

TOOLS AND ACCESSORIES

Hy-Tech offers solid performance and we back our ATP tool designs with over seventy-five years of experience. We take a common sense approach to the features of our products, if a particular part lasts longer machined from bronze it stays that way, we don't compromise quality.

We've shaped the ATP product line to be solidly dependable and competitively priced. Our replacement parts may be in your plant's pneumatic tools now.

Hy-Tech has been manufacturing replacement parts for most of the industry's recognized professional tool products for decades



AIR MOVERS

High Performance Jet Fan Fits 20" API tank opening bolt circle, Moves up to 11,200 CFM with air pressure between 40 and 110 PSI

Air Horns Air Horns (5 different sizes available), includes grounding clamp, operators on air or steam.



AIR DISTRIBUTION MANIFOLDS & AIR HOISTS

6 Station Air Distribution Manifold with Automatic Moisture Separator

ATP Air Chain Hoists 500lb, 1000lb, 2000lb, and 4000 lb. capacity: Self locking worm gear design eliminates need for brake, exceptional control for placement of load



OZAT SOCKETS AND TOOLS


Square Drive 1/2 Inch to 3-1/2 Inch ; #4 & #5 Spline Drive

Flat or Offset Striking Wrenches

Torsion Bars

Ret Ring Socket Retainer

Replacement Hex Bits

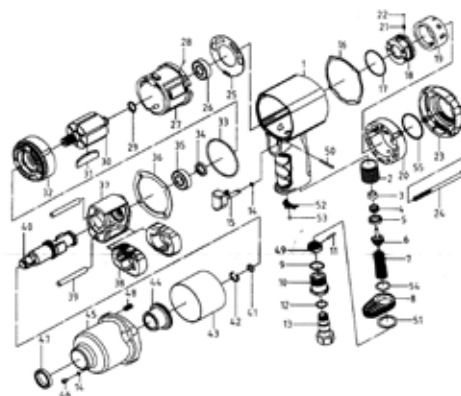

OEM EQUIVALENT PARTS

Certified to be OEM Equivalent or better!

Ingersoll Rand Equivalent Parts

Chicago Pneumatic Equivalent Parts

Cleco Equivalent Parts

Genuine Thor Replacement Parts

PROFESSIONAL PNEUMATIC TOOLS

www.apr-tools.com

American Pneumatic Tools, Inc.

(APT) is a leading provider of Pneumatic Tools for the Construction and Industrial markets.

Now in its eighth decade and going strong, APT has been synonymous

with quality since 1938, and meets the most demanding criteria for superior performance and reliability.

APT Products are included in the Cavalier Industries Ltd quick ship program, with regional stock.



PAVING BREAKERS

Tough and dependable, the high performance paving breakers are designed for big jobs such as heavy demolition and concrete breaking, or medium to heavy demolition work and concrete breaking. Range from 30lbs to 60lbs.



ROCK DRILLS

Designed for drilling holes for anchor bolts and small dowel hole drilling. Larger models for general construction, utility work and plant maintenance. Available in wet drill models when dust suppression is required. Multiple chuck options.



RIVET BUSTERS

Today the rivet Buster series is widely known for its tough, powerful tools. They have the ability to perform all types of medium to heavy demolition work. Rivet Busters are offered in 6", 8" and 11" strokes.



CHIPPING HAMMERS

APT Chipping hammers are used for work such as scaling, chiseling, removing concrete build up from the inside of concrete mixers, light concrete demolition, cement finishing and form stripping.



CLAY AND TRENCH DIGGERS

The rugged APT Clay and Trench Digger models are used for digging clay, shale, hard pan and frozen ground.



TAMPERS

The APT Model 131 Backfill Tamper is used for soil compaction, temporary filling of holes, asphalt packing etc. Applications range from foundation and pavement repair to the installation of power and telephone poles.

PROFESSIONAL CONCRETE CONTRACTOR TOOLS

www.bnproducts.com

We will be passionate about supplying the best product lines, supporting our distribution channels, and providing superior customer service. We will represent innovative quality products and marketing concepts that exceed

our customer's expectations while anticipating their needs for tomorrow. We strive to be a trustworthy company based on strong values and to be the leader in our markets by placing the customer first.



REBAR CUTTERS

Models range from 16mm (#5) - 32mm (#10)
cETL approved



MANUAL BENDER/CUTTER

5/8" / 16mm capacity
Adjustable bending roller, up to 2.5"
Unit ships mounted on board



COMBO BENDER/ CUTTERS

Models range from 16mm (#5) - 32mm (#10)
cETL approved
Electric over Hydraulic heavy duty design



TABLE TOP REBAR BENDERS

Models range from 16mm (#5) - 32mm (#10)
cETL approved
Preset angle locks for repetition



REBAR TIER

Ties up to 32mm (#10) x 32mm (#10)
Reduces tying time
Single hand operations allows operator to position rebar



CUTTING EDGE SAW

Unique flush-cutting blade guard that greatly reduces blade exposure

Designed to emit minimal cutting sparks and the cut material is burr-free and cool to the touch



PADDLE MIXERS

From low-viscosity paints to high-viscosity mortars we have a new mixer to get your job done quicker, safer and easier than using a conventional 1/2" drill. BN professional hand held paddle mixers and you will get the job done 30-40% faster!



BOLT CUTTERS

The New Design BNBC Bolt Cutter Comes in three sizes and all have three cutting edges!

Replaceable & Rotatable Three-Edge Cutting Blades are made from Special Hardened Alloy Steel for Long Life.



ROBO JOINER

The Robo Joiner makes concrete control joints quickly and easily. The Joiner makes both rolled-edge and narrow saw cut like joints. It saves time and effort when making control joints in wet concrete.

ACCESSORIES TO DRIVE REVENUE



BOSCH

Invented for life

www.boschtools.com

MERCHANDISERS

SDS Bits complete range

Hole Saws complete range

Concrete Resurfacing dustless technology

Blades all types



ANCHOR SYSTEMS

Mechanical anchors

Chemical anchors

Pins and Shot

Powder Actuated Systems

Quick Drive Systems



11253VSR

5/8" Max Rotary

7.2 Amps

2.2 Ft.Lbs. Impact

3/16"-5/8" Opt Range

6.4 Lbs



11255VSR

1" Max Rotary

7.5 Amps

2.2 Ft.Lbs. Impact

3/16"-5/8" Opt Range

6.7 Lbs



RH328VC

1-1/8" Max Rotary

8.0 Amps

2.6 Ft.Lbs. Impact

1/4"-7/8" Opt Range

7.7 Lbs



11240

1-9/16" Max Rotary

10 Amps

5.2 Ft.Lbs. Impact

1/2"-1-3/8" Opt Range

13.2 Lbs



11264EVS

1-5/8" Max Rotary

13 Amps

8.1 Ft.Lbs. Impact

1/2"-1-7/16" Opt Range

14.3 Lbs

PROFESSIONAL POWER TOOLING



BOSCH
Invented for life



11263EVS

1-3/4" Max Rotary
13.5 Amps
11.1 Ft.Lbs. Impact
5/8"-1-9/16" Opt Range
17.9 Lbs



11245EVS

2" Max Rotary
14 Amps
13.3 Ft.Lbs. Impact
3/4"-1-3/4" Opt Range
24.5 Lbs



11316EVS

Demolition Hammer
14 Amps
18.4 Ft.Lbs. Impact
SDS Max
22.5 Lbs



11335K

Demolition Hammer
15 Amps
34 Ft.Lbs. Impact
1-18" x 6" Shank
38.0 Lbs



BH2760VC

Demolition Hammer
15 Amps
49.5 Ft.Lbs. Impact
1-18" x 6" Shank
65.0 Lbs



1821D

5-Inch Rat Tail Grinder
with No Lock-On Switch
Unmatched Power to
Weight Ratio - most
powerful 5-Inch in its
class - 9.5 amps.



1773AK

5" Concrete Surfacing
Grinder.
10 Amps and 11,000
RPM.
Lock-on/off switch —
for extended use



1775E

5" Tuckpoint Grinder
Powerful 8.5 Amp 11,000
RPM motor
Large viewing window
Variable depth



4000-09

10-Inch Benchtop Table
Saw with Gravity Rise
Wheeled Stand
15 amp, 4.4-horsepower
output; soft start;
precision-rip fence



TC10-07

10-Inch Wet Tile and
Stone Saw with Folding
Stand
1.4 HP, 4200 RPM Motor
- For cutting porcelain
and stone



PNEUMATICS

Air nailers for your specific application
Roofing coil nailers made for your
business
Finishing / brad nailers
Narrow crown nailers



GRINDERS

Surface grinders diamond tipped
Angle grinders for all application
Die Grinders multiple sizes and
accessories



CORDLESS TOOLS

Battery technology 12 volt to 36
volt,
Lithium Ion batteries

PROFESSIONAL PUMPING EQUIPMENT



www.bjmpumps.com

BJM Pumps® supplies a wide variety of submersible pumps and pump accessories for many different

applications.

BJM Pumps® is headquartered in Old Saybrook, CT and has been serving the industry since



KZN HEAVY DUTY AGITATOR SLURRY PUMPS

Abrasive-resistant, hard metal slurry pumps that agitate settled solids into suspension, dewatering up to 70% solids (by weight). Top discharge allows pump down to inches from bottom.

10 models, ranging from 3"-6" discharge, 5-30 HP, flows 475-1690 GPM, heads to 105 ft. Chrome iron impeller, agitator and wear plate and hardened ductile iron volute with double silicon carbide mechanical seals. KZNR severe duty pumps volutes hardened to 74 Rockwell C.

Pump motors are 3 phase, and available 208, 230, 460, or 575V, have class H insulation and overload protection.

Ideal for coal prep plant and conveyor run-off sumps, power plant fly-furnace ash sumps, slurry ponds, quarries and mill scale pits

ADDITIONAL HEAVY DUTY DEWATERING AND LIGHT SLURRY PUMPS



LWA SERIES

9 models, 3"-6" discharge, flows up to 506 GPM, heads to 123 ft., solids up to 0.4".

Designed and constructed for dewatering sand, silt, coal mines and abrasive light slurries.



KB SERIES

6 models, 3"-6" discharge, flows up to 660 GPM, heads up to 164 ft., solids up to 0.39". Heavy duty dewatering/light slurry – ideal for settling basins, retention ponds and wash sumps or any pump job with silt, sand or coal fines.



PIG SERIES

4 models, 4" discharge, flows up to 924 GPM, heads up to 95 ft., solids up to 3". The only horizontal submersible recessed impeller vortex pump capable of pumping both large solids and abrasive slurries without clogging or excessive wear.



HAZ SERIES (MSHA)

4 models, 3"-4" discharge, flows up to 655 GPM, heads up to 69 ft., solids up to 1". First permissible slurry pump with an agitator, designed to resist abrasive wear that causes loss of pump performance.



XP-SK SERIES

FM Approved Explosion Proof for Class 1, Div. 1 groups C and D Locations

The unique construction and solids handling of the BJM Shredder™ pump makes it the choice for municipal wastewater and industrial wastewater applications.

7 models available, 3"-6" discharge sizes, flows up to 900 GPM and heads up to 110 ft., solids up to 3.5".

CAST IRON GENERAL SERVICES PUMPS

58 models, 1"-6" discharge, 0.15-20 HP, flows 21-911 GPM, heads to 141 ft. Pumps are cast iron with 304SS motor housing, fitted with Buna-N O-rings and double mechanical seals. Pump motors are 115 or 230V single phase; 208, 230, 460 and 575V three phase, with class F insulation, automatic thermal overload protection. Seal Minder® standard on all models except R series.



J / JH SUMP PUMP

15 models, 2"-4" discharge, 0.5-10 HP, flows to 647 GPM, heads to 141 ft.



S NON CLOG PUMP

7 models, 2"-4" discharge, 1-10 HP, flows to 590 GPM, heads to 99 ft



SK SHREDDER

9 models, 2"-6" discharge, 1-20 HP, flows to 911 GPM, heads to 101 ft.



SV VORTEX

11 models, 2"-4" discharge, 0.33-10 HP, flows to 726 GPM, heads to 48 ft.



R DEWATERING

10 models, 1.25"- 4" discharge, 0.15-2 HP, flows to 151 GPM, heads to 71 ft.

X SERIES - CAST 316 STAINLESS STEEL PUMPS

37 models, ranging from 2"-6" discharge. 0.5-20 HP, flows 66-911 GPM and heads to 141 ft. Pumps are cast 316SS (not welded or stamped 304SS) fitted with FKM O-rings, double mechanical seals (Silicon/Carbide lower and Carbon/Ceramic upper), a lip seal and Seal Minder®.

BJM pump motors are available in 115 or 230V single phase; 208, 230, 460 or 575V three phase, have class F insulation and automatic thermal overload protection.



JX/JXH SUMP PUMP

15 models, 2"-4" discharge, flows up to 647 GPM, heads up to 141 ft, solids up to .38".



RX TOP DISCHARGE

4 models, 2" discharge, flows up to 116 GPM, heads up to 71 ft, solids up to .25"



SX NON-CLOG

8 models, 2"-4" discharge, flows up to 590 GPM, heads up to 99 ft, solids up to 2.5".



SKX SHREDDER

10 models, 2"-6" discharge, flows up to 911 GPM, heads up to 101 ft, shredding solids up to



PERFECTA® PUMPS

5 models, 0.4 HP, 115V, flows to 47 GPM, head to 27 ft., pumps down to 1.5".

The only electric submersible pump made of Noryl®, a glass-filled thermoplastic with a wide range of chemical resistance to acids, bases, caustics and fluids with free chlorides. Can handle 135°F liquid continuous and 195°F intermittent.

Ideal for metal plating, pickling baths, portable dewatering, and chemical sumps



FAHRENHEIT PUMPS

Engineered for submersible pumping corrosive and non-corrosive, clear or wastewater liquids containing solids, and sumps where liquids are too hot for conventionally built submersible pumps . . . up to 200 degrees Fahrenheit!

30 difference models including J-F, JX-F, SK-F, SKX-F, and KZN-F (H) Series, temperatures up to 200 degrees Fahrenheit.

PROFESSIONAL CONCRETE TOOLING

**Brunner
& Lay**

www.brunnerlay.com

One of the main contributors to the success and longevity of B&L is the strength and experience in our customer support and product knowledge team. With over a combined 75 years on the customer service desks, we have the ability to solve almost any problem or

answer any question that may arise. If in need of product specific assistance, such as carbide type or bit face design for a certain drilling application. All of this knowledge and know-how is available by phone or email.



PAVING BREAKER STEEL

Additional type/size/lengths available.
Please enquire for complete listing.



Description	Chuck	Length	Order Number
Point	1-1/8"x6"	18"	A31018
Chisel	1-1/8"x6"	18"	A32018
3" Chisel	1-1/8"x6"	18"	A33018
Asphalt Cutter	1-1/8"x6"	12"	B30500

ELECTRIC HAMMER STEEL

Additional type/size/lengths available.
Please enquire for complete listing.



Description	Chuck	Length	Order Number
Point	SDS Plus	10"	L02J12
Chisel	SDS Plus	10"	L03J12
Wide Chisel	SDS Plus	10"	L02G12
Point	SDS Plus	10"	L03J12
Chisel	SDS Plus	10"	L02G12
Wide Chisel	SDS Plus	10"	L03J12

CHIPPING HAMMER STEEL

Additional type/size/lengths available.
Please enquire for complete listing.



Description	Chuck	Length	Order Number
Point	Round/Oval	12"	L02J12
Chisel	Round/Oval	12"	L03J12
Point	Hex/Round	12"	L02G12
Chisel	Hex/Round	12"	L03G12

RIVET BUSTER STEEL

Additional type/size/lengths available.
Please enquire for complete listing.



Description	Chuck	Length	Order Number
Point	Round/Oval	12"	L02J12
Chisel	Round/Oval	12"	L03J12

PROFESSIONAL VENTILATION EQUIPMENT



www.buhincorp.com



At Buhin, we understand that tough jobs require tough fans. That's why we designed our fans to perform dependably under the most extreme conditions.

For over nine years, Buhin Corporation

has been at the forefront in the design and manufacture of specialized industrial ventilation equipment. Utilizing years of experience, we've redesigned and improved our ventilators, which are showcased here.



20" CHINOOK

- CFM rating of 9,906 (281 m³/min)
- Weighs only 121 lbs (55 kg)
- Two built-in handles
- Powerful 5 H.P. electric motor



16" STORM / STORM PLUS

- Full 1 H.P. motor
- Ductable
- Interlocking ribs for stacking vertically
- Dual wall, high-density polyethylene shell



TURBO CARPET DRYER

- 3 Speed
- Stackable
- 3 operating positions (0, 45, 90 degrees)
- Polyethylene housing
- Corrosion Resistant
- 20' power cord



12" VELOCITY

- Weighs only 32 lbs. (15 kgs)
- CFM rating of 2518 (72 m³/min)
- Stackable (increases capacity, reduce storage space)



8" WHIRL

- Weighs only 16 lbs (8 kg)
- CFM rating of 615 (18 m³/min)
- Stackable (increases capacity, reduce storage space)
- Connect up to 50' (15 m) of duct



DUCTING

- Full range of complimentary ducting solutions
- Duct carriers
- Disposable ducting solutions



TEMPORARY FENCING SOLUTIONS

Easy to handle and simple to erect, Broadfence panels come in 8ft long sections, 6 ft high with long and wide removable feet.

- Galvanized
- Construction sites, event security, residential renovations, emergency, and community events
- Made in Canada - fast shipping anywhere in the country



Easy Assembly




Fast Delivery to your Site



Solid Rod Sturdy Legs



Easy Bar System

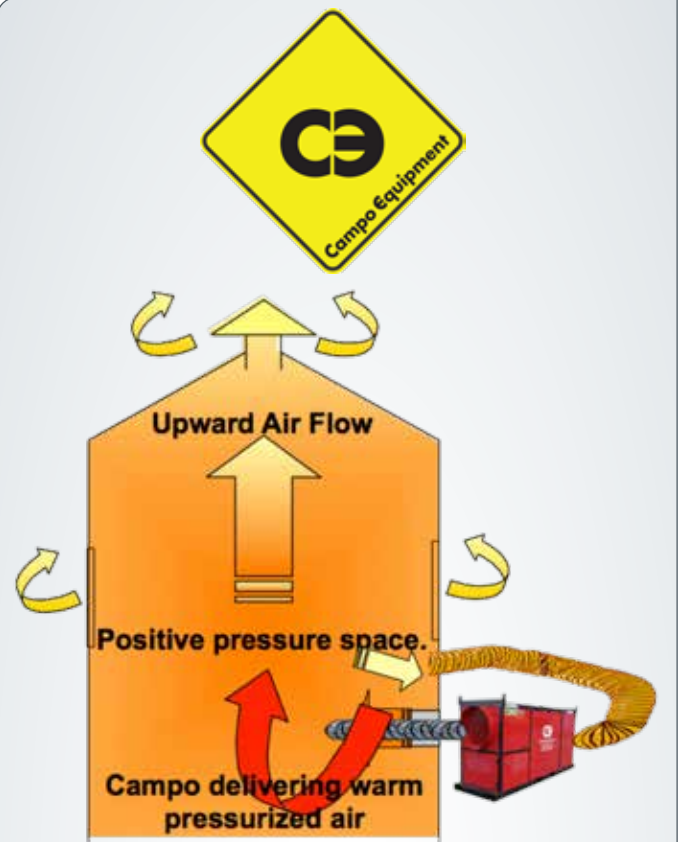

HIGH EFFICIENCY TEMPORARY HEATING



www.campoequipment.com

In recent years, Campo Equipment has transformed itself into a multi-brand commercial products manufacturer serving primarily the equipment rental industry. Today, we are a diversified industrial firm providing products and solutions to enhance

industrial productivity and efficiency. We constantly strive for innovation and continuous product improvement. All the equipment we engineer and manufacture have "first-time-ever" features that were derived from field testing and end user input.



BLAZE 1.5E

CSA Approved electric heater.

BTU/Hour	5,100
Watts	1,500
Volts / Amps	120V / 13A
Air Flow	125 CFM



BLAZE 9E

CSA Approved electric heater.

BTU/Hour	30,700
Watts	9,000
Volts / Amps	240V / 34.5A
Air Flow	550CFM



MOFH280-400 & BLAZE 400G

Input BTU/h: 396,000 / 399,000

Oil Fired: Beckett / NG/LP Fired: Riello

Fuel Tank Capacity: 42 US Gallons

Heated Air Volume: 3500 cfm

Running Time: Up to 21 hours (Low Fire)

Weight: 450 lbs



BLAZE 700 D/G

Input BTU/h: 700,000

OIL/NG/LP Fired, Beckett Burner

Heated Air Volume: up to 10,000 cfm

Single Phase or Three Phase

Full Load Amps: 1 Ø 16 Amps, 3 Ø 8.5

Voltage: 208-230v



BLAZE 1000G

Input BTU/h: 1,000,000

NG/LP Fired, Beckett Burner

Heated Air Volume: up to 13,500 cfm

Single Phase or Three Phase

Full Load Amps: 1 Ø 16 Amps, 3 Ø 8.5 Amps

Voltage: 208-230v.



BLAZE 2000D/G

Input BTU/h: 2,000,000

Oil/NG/LP Fired, Beckett Burner

Heated Air Volume: up to 16,000 cfm

Single Phase or Three Phase

Full Load Amps: 1 Ø 55 Amps, 3 Ø 32 Amps

Voltage: 208-230v.

PROFESSIONAL CONCRETE SUPPLIES



ChemMasters, Inc. is a specialized manufacturer of concrete coatings and chemicals. Everything we do relates specifically to the improvement, repair, and protection of concrete and masonry. We are

innovators. Our intense focus concrete coupled with a state of the art research and development facility has yielding many concrete industry firsts, as well as products that are unique to us.



CONCRETE CURES, CURE AND SEALS, AND SEALERS

- DOT Concrete curing compounds (dissipating resins and wax emulsions)
- Film forming: to protect and beautify concrete
- Penetrating: To increase the life of concrete



REPAIR MORTARS

Repair or improve damaged concrete with hydraulic cement, overlays, patching mortars, and underlayments.

- High strength
- Self levelling
- Non shrink



GROUTS

High performance grouts delivery performance where you need it.

- Non shrink, non metallic grout
- Epoxy grout
- Post tensioned grout
- Methyl methacrylate grout



CONCRETE COATINGS AND TOPPINGS

- Concrete wall coatings
- Bridge sealers
- Commercial building exterior products



CONCRETE RELEASE AND BONDING AGENTS

- Form releases for standard and specialty construction
- High performance bonding agents to amp up your mortar performance



SPECIAL PURPOSE CONCRETE PRODUCTS

- Accelerators and retarders
- Cleaners and solvents
- Concrete tinting and anti-slip products



OUR KNOWLEGE IS CONCRETE

For over half a century has advanced the science of concrete improvement.

If you only thought ChemMasters made concrete cures and seals...read on!

Our extensive offering of job-proven products includes:

- repair mortars
 - grouts
 - bridge and wall coatings
 - concrete coatings and toppings
 - concrete release and bonding agents
 - special purpose products, and yes,
 - a complete line of cures, cure & seals and sealers for concrete
- Many of our products are our own innovations, available only from ChemMasters.



DMI-LT

STADIUM LIGHT SOLUTIONS

DMI began to fabricate stadium lights in 2010. The company has been in the welding and fabrication business of steel and pipe spools for the oil and gas industry since 1961 in Baton Rouge, Louisiana.

DMI Light Towers are designed and engineered to exacting performance benchmarks, specific to Canadian industry. Cold weather performance combined with options and features to increase operational efficiency, safety, and performance offer customers incredible ROI.

- 55' Tower Height
- 45 kVa onboard power with Kubota Engine
- Canadian Electrical Inspection
- Transport Canada compliant design
- Robust tube steel frame
- Stainless Steel NEMA 4 main disconnect
- 85 KPH wind rating at full height
- 175 kph wind rating at lowest height




WHAT'S YOUR LIGHTING APPLICATION?

Help us understand your lighting application, we have numerous custom options to ensure the best possible fit for your specific application.



www.dmilighttowers.com

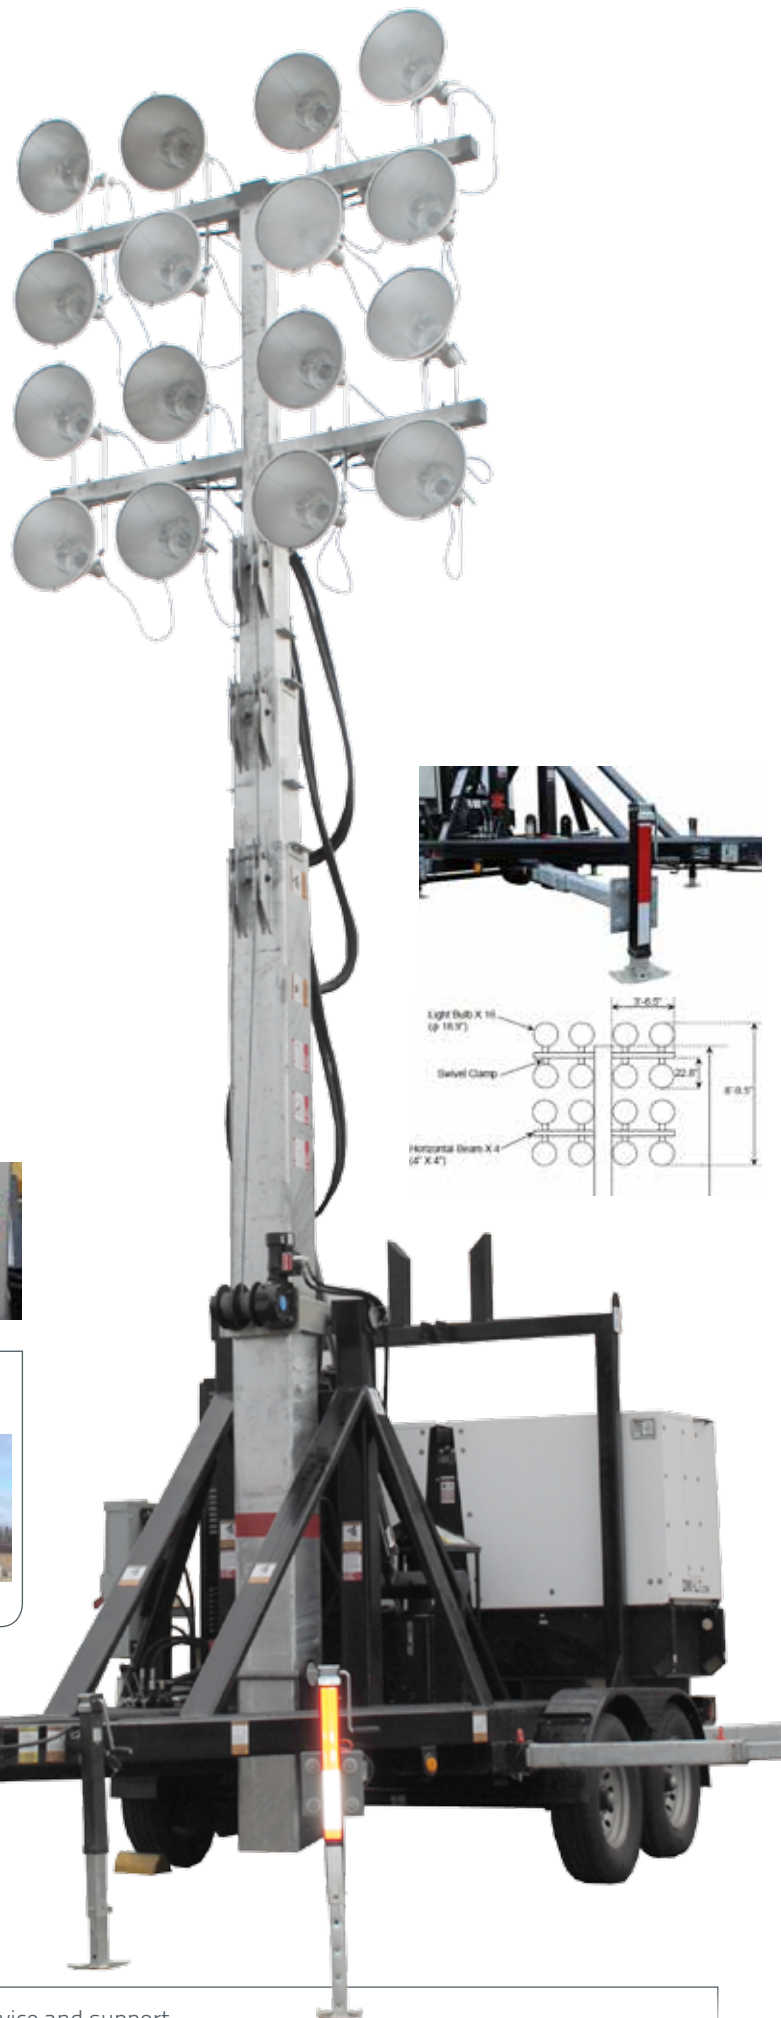




www.colemancable.com

POWER DISTRIBUTION PANELS

The X-Treme Box is a portable, flexible, rugged, and reliable power distribution center designed to withstand harsh job site conditions.

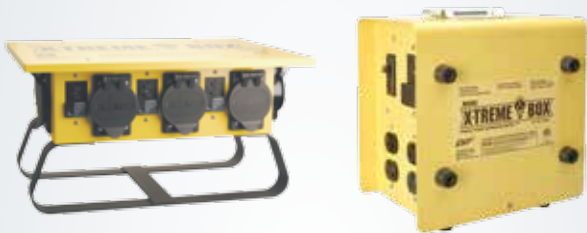

POWER DISTRIBUTION CABLES

Off the shelf and custom distribution cables setup to meet your requirements. All cables assembled in CSA approved shop.



TWIST LOCKS AND PLUGS

Complete selection of twist locks and pin and sleeve type plugs.



TRAILERIZED TANK SOLUTIONS

DESIGNED FOR CANADIAN CONDITIONS



Custom designed trailers with integral transport Canada approved tanks - enjoy the benefits of large on board fuel tanks for remote locations or long term applications - designed and built to your requirements.



UL SUB BASE TANKS



UL142 Sub Base fuel tanks for on-location standby applications - designed and built to your specification.

PORTABLE FUEL TANK SOLUTIONS




www.guardiantanks.com



Guardian Tanks offers a variety of transportation and storage solutions for combustible and flammable liquids (e.g.: gasoline, diesel, AV gas, jet fuel, etc.), lubricants and hydraulic fluids.

Designed and built in Canada to meet or exceed all Canadian regulations - haul full of fuel as required.

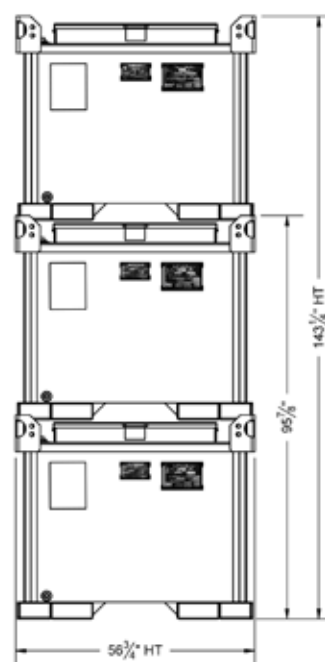

UN-UL APPROVED PORTABLE FUEL TANKS

Our range of UN-UL approved portable fuel tanks provides Transport Canada approved solutions for site and equipment fueling requirements. Each tank comes equipped with 4 x supply and return lines - and can come equipped with an optional 12v or 120v fuel pump. Our innovative design provides maneuverability - and long term performance for your equipment fleet.

Item #	Volume			Type	Primary Tank Thickness	Secondary Tank Thickness	Tare Weight		Full Weight		Dimensions		
	Litres	Imp. Gal.	US Gal.				KG	LBS	KG	LBS	L (in)	W (in)	H (in)
AGB-DTI-500	500	110	132	Double Wall	11 ga	12ga	454	999	954	2099	47	53	35
AGB-DTI-1000	1000	220	264		11 ga		601	1322	1601	3522	57	48	49
AGB-DTI-2000	2000	440	528		3/16"		1025	2255	3025	6655	50	92	51
AGB-DTI-3000	3000	660	793		1/4"		1614	3551	4614	10151	69	94	52
AGB-DTI-4000	4000	880	1057		1/4"		1886	4149	5886	12949	89	94	52
AGB-DTI-5000	5000	1100	1321		1/4"		2166	4765	7166	15765	94	108	52

	Engine-Drive	Class	Stick	MIG	Flux Core*	AC TIG	DC TIG	PAC**	CAC-A
Gas	Blue Star® 145 DX	●	●				●	●	
	Blue Star® 185 DX	●	●				●	●	
	Wildcat® 200	●	●				●	●	
	Bobcat™ 225	●	●	●	●	●	●	●	
	Bobcat™ 3 Phase	●	●	●	●	●	●	●	3/16"
	Bobcat™ 250	●	●	●	●	●	●	●	3/16"
	Trailblazer® 275	●	●	●	●		●	●	3/16"
	Trailblazer® 325	●	●	●	●		●	●	3/16"
	Trailblazer® 302 Air Pak™	●	●	●	●	●	●	●	3/16"
Diesel	Bobcat™ 250 Diesel	●	●	●	●	●	●	●	3/16"
	Big Blue® 300 Pro	●	●	●	●		●	●	1/4"
	Trailblazer® 325 Diesel	●	●	●	●		●	●	3/16"
	Big Blue® 350 PipePro®	●	●	●	●		●	●	1/4"
	Big Blue® 400 Eco Pro	●	●	●	●		●	●	5/16"
	Big Blue® 450 Duo CST™	●	●				●	●	
	Big Blue® 400	●	●	●	●		●	●	5/16"
	Big Blue® 500	●	●	●	●		●	●	3/8"
	Big Blue® 500 Pro	●	●	●	●		●	●	3/8"
	Big Blue® Turbo	●	●	●	●		●	●	1/2"
	Big Blue® 700 Duo Pro	●	●	●	●		●	●	3/8"
	Big Blue® Air Pak™	●	●	●	●	●	●	●	1/2"
Diesel	Big Blue® 800 Duo Air Pak™	●	●	●	●		●	●	1/2"



www.millerwelds.com

MILLER ENGINE DRIVEN WELDERS

Complete product range of engine driven welders for light industrial, and heavy industrial markets.

Cold weather tested and CSA approved design to provide excellent performance, and reliability in tough Canadian conditions.

BLUESTAR PORTABLE WELDERS

Honda or Robin engines available.



BIG BLUE SERIES WELDER

Low speed, compact diesel welder ideal for the construction contractor, independent rig owner or fleet manager.



BOBCAT SERIES WELDER

Rugged welder/generator is great for Stick and Flux-Cored welding and designed for maintenance/repair operations, construction, farm, ranch and generator duty.



PROFESSIONAL PUMPING EQUIPMENT

MSP designs, develops and produces pumps and dewatering equipment that set new industry standards for flow capacity and fuel efficiency.

Our precision manufacturing process and durable, high-quality finish

products increase longevity and make our equipment more reliable and deliver better overall value. Customers in the U.S. and abroad can buy or lease our equipment with the confidence that comes from our 100% satisfaction guarantee.



www.myersseth.com



DOUBLE DIAPHRAGM PUMPS

- Heavy duty constructed frame and pump components
- Self-priming, dry running
- High suction lift (28 ft.)
- Powder coated frame and pump body



DRY PRIME TRASH PUMPS

- Well suited for Construction, Industrial, Municipal & Mining Applications
- Fully Automatic Dry Priming to 28 feet
- Moderate heads to 145 feet
- Capability of Dry Running



HIGH PRESSURE PUMPS

- Custom pump design for application
- Cat or John Deere Engines



ROTARY LOBE PUMPS

- Construction, Industrial and Municipal Applications
- Maximum flows to 3,000 GPM
- Capability for dry running for short periods



TRASH PUMPS

- Multiple pump applications, dewatering, tank transfer, tank cleaning, and transfer of industrial waste products
- Large Solid Handling capability
- Large Fuel Tank



HIGH VOLUME PUMPS

- Maximum flows to 5300 GPM
- Large fuel tank
- Capability of dry running
- Moderate heads up to 175 feet
- Fully automatic dry priming

LIGHTWEIGHT ACCESS PLATFORMS

Custom Equipment's mission is to design, manufacture and market high-quality, specialized platform lift equipment that is built to exceed our customers' expectations.

Light weight, productive machines

designed to boost job site productivity and safety for interior work.

Versatility at every stage.

Functionality Second to None.

Industry leading capacity.

Hy-Brid Lifts

by Custom Equipment

www.hybridlifts.com



HB1430

Increase job site productivity and meet floor load requirements. Great for multi-storey construction, fits in most elevators and skips.

- Working height up to 20 ft
- Weighs only 1650 lbs
- Weight allows machine to go on delicate flooring
- Lifts 670 lbs
- Slide-out deck extension, with slip-resistant surface
- Non-marking tires
- 1-year parts and labor warranty
- 5-year structural warranty

ZERO TURN POWERED/PUSH AROUND LIFTS

- Working height up to 14 ft
- Weight allows machine to go on delicate flooring
- 500lb. platform capacity



Models	HB-P830	HB-830	B-1030	HB-1230	HB-1430
Working Height	14 ft (4.27 m)	14 ft (4.27 m)	16 ft (4.87m)	18 ft (5.49 m)	20 ft (6.1 m)
Platform Height	8 ft (2.44 m)	8 ft (2.44 m)	10 ft (3m)	12 ft (3.66 m)	14 ft (4.26 m)
Overall Length	43 in. (1.09 m)	47 in. (1.19 m)	63.5 in. (1.61 m)	55.75 in (1.42 m)	69.5 in. (1.76 m)
Overall Width	30 in. (0.76 m)				
Platform Cap.	500 lb. (226.8 kg)	500 lb. (226.8 kg)	750 lb. (340.2 kg)	500 lb. (226.8 kg)	670 lb. (304 kg)
Extension Cap.	N/A				
Min Wheel Load	21.25 psi (146.8 kPa)	68.8 psi (474.8 kPa)	62.7 psi (432.5 kPa)	TBD	80.9 psi (557.6 kPa)
Max Wheel Load	36.88 psi (254.2 kPa)				
Weight	680 lb (346 kg)	1080 lb. (506 kg)	1273 lb. (577.4 kg)	1670 lb. (758 kg)	1645 lb. (746 kg)

HEAVY DUTY CONCRETE PREPARATION



GRINDERS AND POLISHERS

Rental grade, heavy duty production.

Kut-Rite concrete floor grinders and polishers are the most diverse surface preparation machines on the market today. Our Equipment and processes are designed to transform ordinary concrete into attractive, finished floors for both commercial and residential settings! We work together with architects, builders, contractors and facility managers to develop and execute successful plans for all of your flooring needs.

HANDHELD

GRINDER / POLISHER

The KR7 handheld grinder and variable speed polisher provide an economical solution to edging detail. Use the KR7 handheld grinder to clean concrete, remove coatings, mastics, urethanes, epoxies and paint.



EDGE CUTTER

CUT RIGHT TO THE EDGE

The final frontier in resurfacing existing floors, however, remains how to deal with the edges: how to get close enough to the wall; how to match the appearance of the edge work with the rest of the floor; how to eliminate the back-breaking work on hands and knees, with your nose too close to a dusty operation. Several devices have come on the market that serve as an extension tool for the standard angle grinder and polisher, but the challenge with these devices is how to make them agile enough that they allow the operator to feel and control the edging operation as effectively as he would if he were down on the floor in direct contact with the surface and the hand grinder.

Kut-Rite sells this machine in a stand alone version with grinder or polisher and in package offerings with its own brand of diamond cup wheel, MetalEDGE™ metal rings that are available in 30, 60 and 150 grit and/or a full set of EDGEKutter™ polishing rings.



CONCRETE SCARIFIERS

The Kut-Rite line of concrete floor scarifiers are the epitome of Heavy Duty. With sizes ranging from our highly portable 6" Scarifier all the way to our 13" Hydraulic Scarifier attachment, Kut-Rite removal tools and equipment provide the lowest price per foot in the industry.

Model	Lbs.	Size	Power/Engine Specs	Production Sq. Ft.
KR13G11	379	13"	Honda GX 11HP	450-600/hr
KR13G13	379	13"	Honda GX 13HP	450-600/hr
KR13E5	407	13"	2hp, 120v 1PH 24.8FLA	450-600/hr



The Kut-Rite TKO-2513 Scarifier / Planer Attachment is the most powerful scarifier / planer in its class. In combination with a skid steer machine, the TKO-2513 Scarifier

/ planer attachment weighs in at over 400 pounds and is equipped with a heavy duty bidirectional hydraulic motor.

Model	Lbs.	Size	Power/Engine Specs	Production Sq. Ft.
TKO-2513	450	13"	Hydraulic	800/1000hr

MACHINES CONFIGURED FOR YOUR FLEET



Model	Lbs.	Size	Power/Engine Specs	Production Sq. Ft.
KR6E1.5	169	6"	1.5hp, 120v 1PH 17.2FLA	150-250/hr
KR8G5.5 HD	162	8"	Honda GX 5.5 HP	2-400/hr
KR8E2 HD	190	8"	2hp, 120v 1PH 24.8FLA	2-400/hr
KR10G9	266	10"	Honda GX 9HP	450-600/hr
KR10G11	279	10"	Honda GX 11HP	450-600/hr
KR10E5	306	10"	240/480 1/3PH 13/6 FLA	450-600/hr

KLEAN RITE VACUUM SYSTEMS

REVERSE FLOW TECHNOLOGY

The KleanRite "Reverse Flow" vacuum systems are capable of maintaining constant cfm. This allows you to keep your production time up and your downtime down.



- Patent Pending "Reverse Flow" automatic filter cleaning technology.
- Donaldson Torit Ultra-Web® filter technology.
- One of a kind debris removal valve. We made it easy and safe.

Model	Power (Watts)	Water Lift (Inch H2O)	CFM	Amps
KRMCDF21Z	1700	110"	180	13.9
KRMCDF31Z	1750	80"	280	16.19

PROFESSIONAL PORTABLE EQUIPMENT



The Mi-T-M product line consists of pressure washers, air compressors, generators, and portable heaters.

When you purchase equipment with the Mi-T-M name on it, you're

getting quality equipment that has been designed and tested by a very dedicated group of people with one goal in mind, build it to perform and build it to last. We believe in craftsmanship and value.



AIR COMPRESSORS

Mi-T-M manufactures over 30 models of air compressors giving customers a choice from electric or gasoline, single-stage or two-stage, and portable or stationary.

Note: Honda, Kohler, Subaru, and Mi-T-M engines are available on most gas models.

Model Number	Tank Size	CFM @ PSI	Engine or Motor	Dimensions
Single Stage Gasoline Powered				
AC1-HH04-05M	5 Gal.	4.4 @ 100	118 cc Honda OHV	21.5x17.5x21.75
AM1-PH65-08M	8 Gal.	13.1 @ 100	196cc Honda OHV	44.5x18.5x27
AM1-PH65-20M	20 Gal.	13.1 @ 100	196cc Honda OHV	37x23.5x33
Two Stage Gasoline				
AM2-PH09-08M	8 Gal.	17.2 @ 175	270cc Honda OHV	44x26x31
AM2-PH09-20M	20 Gal.	17.2 @ 175	270cc Honda OHV	46x26x39.5
Two Stage Gasoline Base Mount				
ABS-13H-30H	30 Gal.	29.0 @ 175	389cc Honda OHV	42x19x45
ABS-13H-80H	80 Gal.	29.0 @ 175	389CC Honda OHV	52x26.5x53
Single Stage Electric				
AC1-HE02-05M1	5 Gal.	4.1 @ 100	2.0HP, 120V, 14.0A	20.5x15.5x17.5
AM1-PE15-08M	8 Gal.	6.5 @ 100	1.5HP, 120V, 13.2A	44.5x18.5x25
AM1-PE02-08M	8 Gal.	8.4 @ 100	2.0HP, 120V, 18.8A	44.5x18.5x25
AM1-PE15-20M	20 Gal.	6.5 @ 100	1.5HP, 120V, 13.2A	44.5x18.5x25
AM1-PE02-20M	20 Gal.	8.4 @ 100	2.0HP, 120V, 18.8A	44.5x18.5x25
Two Stage Electric				
AAS-23105-80H	80 Gal.	17.8 @ 175	5.0HP, 230V, 1Ø, 23A	52x26.5x53
AAS-23105-80V	80 Gal.	17.8 @ 175	5.0HP, 230V, 1Ø, 23A	33x25x73



WET / DRY VACUUMS

Tough and dependable, the high performance wet/dry vacuums come with a lifetime canister warranty. Optional HEPA filter for increased performance.

Specification	MV-900-OMEV	MV-1300-OMEV	MV-1800-OMEV
Motor	120v Two Stage Bypass		
Horsepower (Cont)	1.3		1.6
CFM	101		108
Water Lift	87 in.		111 in.
Capacity	9.0 Gal.	13.0 Gal.	18.0 Gal.



COLD WATER WASHERS

Mi-T-M manufactures a complete line of cold water pressure washers for industrial and residential use.

- Gas, Electric, or Diesel Powered
- Direct or belt drive
- Available in Subaru, Honda, Vanguard, and Kohler engines
- Skid mounted units up to 6000PSI available

Model Number	PSI	GPM	Engine or Motor
JP Series - Direct Drive Cold Water Steel Powdercoated			
JP-2403-0MHB	2400	2.4	196cc Honda OHV
JP-2703-0MHB	2700	2.4	196cc Honda OHV
JP-3003-0MHB	3000	3.0	270cc Honda OHV
JP-3504-0MHB	3500	3.5	389cc Honda OHV
JP-4004-1MHB	4000	3.5	389cc Honda OHV

JCW Series - Belt Drive Steel Powdercoated			
JCW-2403-0MHB	2400	2.8	196cc Honda OHV
JCW-2703-0MHB	2700	2.4	196cc Honda OHV
JCW-3504-0MHB	3000	3.7	270cc Honda OHV
JCW-4004-0MHB	3500	3.4	389cc Honda OHV



HOT WATER WASHERS

Mi-T-M manufactures a complete line of cold water pressure washers for industrial and residential use.

- Gas, Electric, or Diesel Powered
- Direct or belt drive

Model Number	PSI	GPM	Engine or Motor
HSP Series - Hot Water Gasoline Direct Drive			
HSP-2503-0MMH	2500	2.7	196cc Honda OHV
HSP-3003-3MHG	3000	2.9	270cc Honda OHV
HSP-3504-3MGH	3500	3.3	389cc Honda OHV

HSE Series - Hot Water Electric Direct/Belt Drive			
HSE-1002-0MGH10	1000	2.0	1.5HP, 120v, 15A
HSE-1502-0MGH10	1500	2.0	2.0HP, 120v, 19A
HSE-2003-0MM10	2000	2.8	4.0HP, 230V, 18.0A

HG Series - Hot Water Natural Gas / LP Shop Install			
HG-3004	3000	3.9	8.0HP - 208-480v

HS Series - Hot Water Gas/Diesel Belt Drive Skid Mount			
HS-4004-1MAH	4000	4.0	689cc Honda
HS-4005-0MDK	4000	4.5	15.5HP



PORTABLE GENERATORS

Mi-T-M manufactures a broad range of generators and starting at 1700 watts ranging to the new powerful 14,000 watt generator.

- Gas, or Diesel engine options
- CSA Approved design

Model Number	Max Watts	Cont Watts	Engine or Motor
GEN-3000-1MHO	3000	2450	163cc Honda OHV
GEN-4000-0MHO	4000	3500	242cc Honda OHV
GEN-6000-0MHO	6000	5000	389cc Honda OHV
GEN-7500-0MHO	7500	6500	389cc Honda OHV
GEN-14000-1MHE	14000	12000	688cc Honda OHV



ENCLOSED FLAME HEATERS

Mi-T-M manufactures a broad range of temporary heating systems.

- Natural Gas or Propane option
- CSA Approved design
- Kerosene direct fired available



JOB BOXES

Mi-T-M job boxes can handle any construction site.

- Powdercoated
- Reinforced support skid
- Solid, arc welded steel construction



SINGLE & DUAL AXLE WASH TRAILERS

Mi-T-M offers several options for trailer mounted pressure washers for the ultimate portable cleaning.

- Surge or electric breaks
- Torsion flex axles
- Transport Canada ready
- Hot or Cold Pressure washers

POWER GENERATION

www.pramac.com



GEW INDUSTRIAL STANDBY

INDUSTRIAL STANDBY GENERATORS



Yanmar or Perkins powered.

- The GEW Series provides the most professional way to fulfill power requirements with highest reliability and excellent performance.
- Listed to UL2200 standards, the GEW range is available in configurations up to 500 kVa.
- Diesel Engine Options: John Deere and MTU
- Natural Gas / Propane: GM Industrial Engines.
- Complete range of standby accessories to create a total, factory engineered solution to standby power applications.

GSW – OPEN OR ENCLOSED


MULTIPLE ENGINE, FUEL, AND POWER OPTIONS

Custom engineered and packaged for your specific application, from oil field to mining application we have the ability to engineer a solution to best fit your needs.

- Multiple voltage options up to 600v
- Yanmar, MTU, and Perkins engine options
- Diesel powder solutions up to 758 kVa
- Advanced digital control systems
- Remote monitoring ability
- Heavy duty frame / enclosure




CUSTOM SOLUTIONS

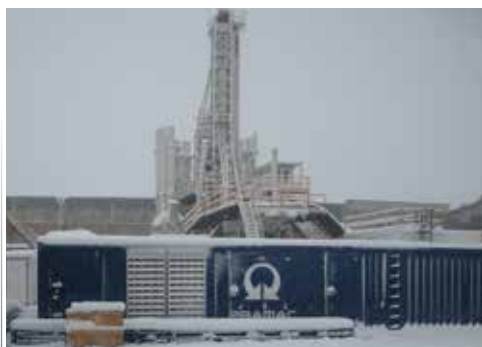

Containerized custom solutions packaged and designed to offer turn key operation.

- Custom distribution options, including multiple voltages w/ transformers
- Twin generator units available
- Fast connections to external tanks or large integral tanks
- Variable speed fans
- Lifting points and skid base
- Plug and Play Start

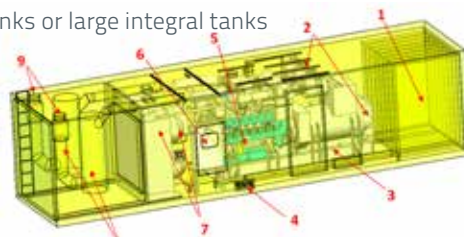



GRW SERIES PORTABLE RENTAL GENERATORS

The strategic objective of final customer satisfaction can only be reached if the quality of the products being offered is high. This is what the Pramac INDUSTRIAL group assumes for its production philosophy.

Our number one concern is total cost of ownership. From reducing operating costs by decreasing fuel consumption to engineering for constant up time, even in extreme cold weather

- Cold Weather Performance Kit
- Easy access fluid drains plumbed to base rail
- Battery Disconnect standard
- Chalwyn positive air shutdown system
- 110% Fluid Containment
 - Setup from the factory cold weather operation
- Fuel efficient Perkins engines
- Excellent cold starting performance
- Mecc Alte alternators with superior motor starting characteristics
- Control system similar for all GRW series

Model	Prime Power kW @ 480v 3 Ø	Standby Power kW @ 480v 3 Ø	Engine
GRW15Y	11.2 @ 240, 1Ø	12.3 @ 240, 1Ø	Yanmar
GRW25Y	17 kW	18.7 kW	Yanmar
GRW35Y	31.6 kW	33 kW	Yanmar
GRW50Y	39.7 kW	43.9 kW	Yanmar

Model	Prime Power kW @ 480v 3 Ø	Standby Power kW @ 480v 3 Ø	Engine
GRW70P	58.2 kW	64 kW	Perkins
GRW90P	74.3 kW	82.3 kW	Perkins
GRW120P	90.6 kW	100.6 kW	Perkins
GRW160P	125.1 kW	141.7 kW	Perkins
GRW200P	156.3 kW	173.1 kW	Perkins

1 Analog control panel with full gauge package. Multi voltage plugs and hard wire distribution lugs for simple and fast deployment. Optional cam locks.



2 Reduce environmental impact with fluid containment, which includes external service drains for coolant, and oil; faster routine maintenance.



3 Designed for long run times - large on board tanks - all models come standard with remote tank valves for simple connection to external tank.



4 Superior sound attenuation - 2" fire retardant insulation provides excellent sound attenuation for low noise operation.



5 Safety first - engineered to perform in cold Canadian climates - belt guarding, heat shielding, and battery disconnect are standard



PROFESSIONAL IAQ & HEATING CONTROL EQUIPMENT

Quest Climate Control Equipment, a division of Therma-Stor, LLC, is manufactured in Madison, WI, USA. Quest offers a complete line of rugged,

high performing, energy efficient, climate control equipment designed and engineered for the construction, concrete and painting professional.



REFRIGERANT DEHUMIDIFIERS

Quest portable dehumidifiers provide low power consumption, highly effect, plug in anywhere dehumidification solutions.

- 5 year warranty standard on all models



Model	Power	Water Removal	Process CFM
PowerDry 1300	5 Amps, 120v	8 gal/day @ AHAM	190
RDS 10	5.4 Amps, 120v	10 gal/day @ AHAM	230
PowerDry 4000	10 Amps, 120v	22 gal/day @ AHAM	380

GLYCOL HEAT MODULES

Quest central heat modules provide reliable, high performance glycol heating - from process heating to air heating the Quest product delivers.

- 5 year combustion chamber warranty
- Stainless steel construction



Model	Power	BTU/HR	Flow Rate
CHH-308	120v, 20 amp	308,000	30 GPM / 0.11 m3m
CHH-980	240v, 50 amp	980,000	80 GPM / 0.30 m3m

DESICCANT DEHUMIDIFIERS

Powerful, industrial dehumidification provides the highest capacity water removal in any ambient condition.



Model	Power	Water Removal	Process CFM
PowerDry 385D	22 amps, 120v (2 x circuits)	14 gal/day @ AHAM	385
PowerDry 1200D	25 or 40 Amp, 240v, 1 Ø	43 gal/day @ AHAM	900
PowerDry 4800D	102 Amp, 480v, 3 Ø	379 gal/day @ AHAM	4800
PowerDry 4800DP	60 Amps, 240v, 1 Ø	379 gal/day @ AHAM	4800

* Note: 4800D available in 600V

HEAT EXCHANGERS

Quest portable heat exchanges deliver excellent performance - utilize HFC unit with either glycol, or hot water systems to provide air heat.



Model	Power	CFM	Weight.
HFC-80	120v, 1.8 Amps	950	85 lbs.
HFC-200	120v, 5.7 Amps	2300	151 lbs.

PORTABLE AIR CONDITIONERS

Portable cooled industrial air conditioners provide simple, reliable portable cooling.

Stainless steel construction and flexible installation options provide excellent application flexibility.



HEPA FILTERS

High performance air scrubbing solutions.




Model	Power	CFM	Weight.
PowerHEPA 500	120v, 1.9 Amps	500	35 lbs.
PowerHEPA 1400	120v, 12 Amps	1400	121 lbs.



GROUND THAWING CONCRETE CURING

THAW up to 12 inches per day and reliably cure concrete in any winter condition.

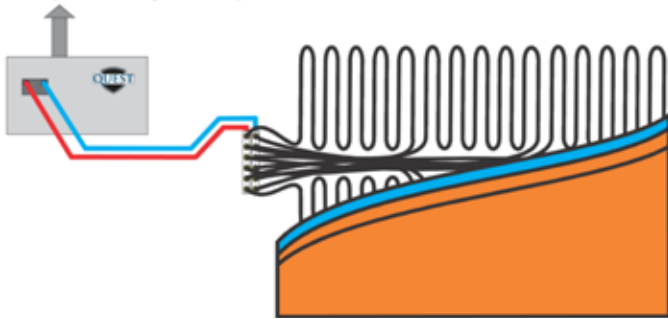


WHAT'S YOUR HYDRONIC APPLICATION?

Quest Climate control equipment covers a wide range of heating, cooling, dehumidification, and air filtration solutions designed for temporary, cost effective deployments.





OIL AND GAS APPLICATIONS

Freeze protection and heating for fluids and processes.

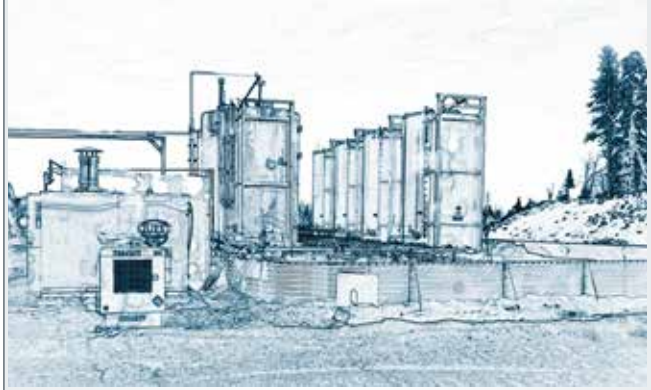

CONSTRUCTION HEATING AND IAQ

Heating, dehumidification, air conditioning, humidification, and air filtration for complete IAQ control during construction.

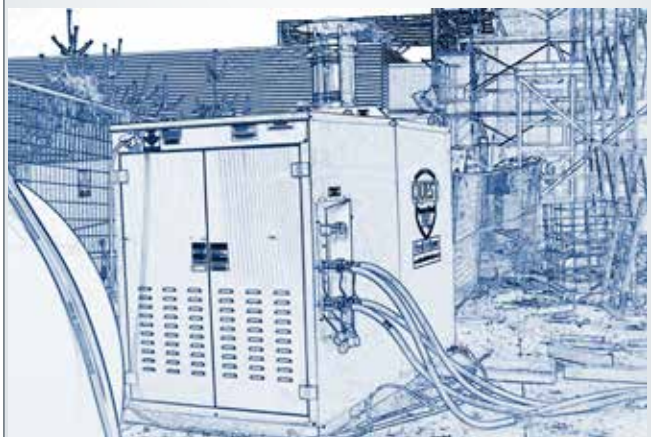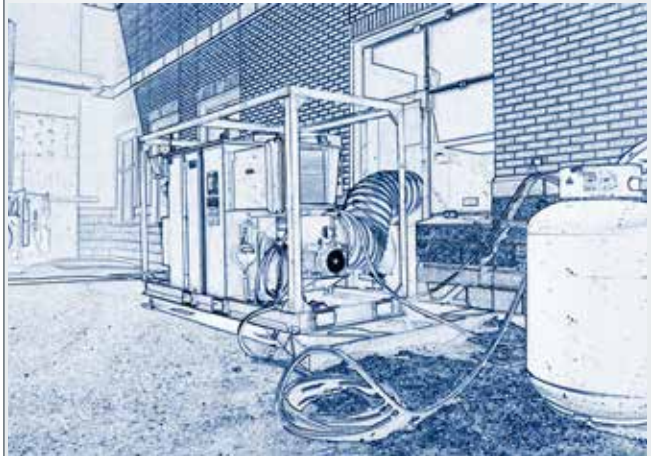

TEMPORARY DUCTING ACCESSORIES



HITEX DUCTING

Hitex™ is a highly durable heater duct designed for portable / temporary heating applications with temperatures up to 300°F to 350°F.



Made in the USA from a heavy duty carbon poly based fabric, steel-wire supported helix, flame resistant material, and a waterproof exterior.

Hitex™ is available from 6" to 36" diameter and available in lengths up to 50'.

We consider Hitex™ heater ducting to be a superior quality product when compared to other ducts available in the temporary heating industry. Hitex™ is manufactured with a heavy duty and highly tear resistant fabric designed for the rugged rental environment.

Order Number	Dia.	Pitch.	Length	Finishing
VA-HT-12612PL	12"	6"	12'	Pin-Lock Coupling
VA-HT-12625PL	12"	6"	25'	Pin-Lock Coupling
VA-HT-12625	12"	6"	25'	Machine Ends
VA-HT-14625	14"	6"	25'	Machine Ends
VA-HT-16612PL	16"	6"	12'	Pin-Lock Coupling
VA-HT-16625PL	12"	6"	25'	Pin-Lock Coupling
VA-HT-16625	16"	6"	25'	Machine Ends
VA-HT-18625	18"	6"	25'	Machine Ends
VA-HT-20625	20"	6"	25'	Machine Ends
VA-HT-24625	24"	6"	25'	Machine Ends

VENTFLEX LOW TEMPERATURE DUCTING

Ventflex is a highly durable air duct designed for portable / temporary air movement applications such as return air and dehumidification systems.



Order Number	Dia.	Pitch.	Length	Finishing
VA-VF-12625	12"	6"	25'	Machine Ends
VA-VF-16425	16"	4"	25'	Machine Ends
VA-VF-18425	18"	4"	25'	Machine Ends
VA-VF-20425	20"	4"	25'	Machine Ends
VA-VF-24425	24"	4"	25'	Machine Ends

DESIGNED TEMPORARY SYSTEMS



***Ducting sizes available in custom lengths with diameter up to 36".

CAVALIER INDUSTRIES LINE CARD | factory direct, sales service and support.

FLAMELESS HEATING SOLUTIONS



www.cavalier-industries.ca



DESIGNED FOR TOUGH CANADIAN WINTER

High performance flameless heating unit provides clean, dry heat in the most demanding conditions. Capturing available heat energy from engine (66% of fuel energy burned is lost as heat), and converting the mechanical energy to heat via heating elements. High heat output with temperature rise up to 300F over ambient temperature provides a reliable, durable solution for heating.

- Design updated for extreme cold weather operation
- Canadian Electrical Inspection
- Transport Canada compliant design
- 110% fluid containment
- Simple control system: control output temperature and

engine RPM to meet application demand

- Positive Air Shut Down: Shocker Pass
- Operator Protection Standard: All moving parts enclosed

RELIABLE, AFFORDABLE PERFORMANCE.

Model	SF750	
BTU Output	750,000 BTU/HR	
Temp Rise	° C	121
	° F	250
Temp Out-put Range	° C	65-150
	° F	150-300
Engine	Cat C6.6, 174 HP	
Efficiency	90%+	
CFM	3,700	
Static Pressure	4"	
Fuel Capacity	Litres	1096
	Gal.	290
Average Fuel Consumption	Litres / Hour	23.4
	Gal / Hour	6.2
Dry Weight	KG.	3629
	LBS.	8000



PROFESSIONAL TRAFFIC

CONTROL EQUIPMENT

Our Mission: To lead the industry in innovative product design and advanced manufacturing techniques.

We vow to continually increase the value added to the products we produce and the services we provide.



www.solartechtechnology.com



SOLAR MESSAGE BOARDS



SILENT MESSENGER

Details for Standard Trailer:

Panel Size: 126 x 76 (320 cm x 193 cm) -

27 x 48 pixels 2.6 in. (6.6 cm) pitch

Solar Array: 160 watts

Batteries: Four (4) 6v HD, deep-cycle (Gel-Cell 2)

Battery Charger: 45 amp output (115 VAC 50/60 Hz input)

Height: (transporting position): 103 (261cm)

Height (operating position): 162 (412cm)

Weight: 2,400 lbs. (min) - 2,960 lbs. (max)



SILENT MESSENGER II

Details for Standard Trailer:

Panel Size: 92 x 54 (320 cm x 193 cm)

27 x 48 pixels 1.75 in. (4.5 cm) pitch

Solar Array: 160 watts

Batteries: Four (4) 6-volt HD, deep-cycle (GC-2)

Battery Charger: 45 amp output (115 VAC 50/60 Hz input)

Height: (transporting position): 92" (234 cm)

Height: (operating position): 142" (360 cm)

Weight: 1,560 lbs. (min) - 1,960 lbs. (max)



SILENT MESSENGER III

Details for Standard Trailer:

Panel Size: 78x 46 (198 cm x 117 cm) -

27 x 48 pixels 1.5 in. (3.8 cm) pitch

Solar Array: 160 watts

Batteries: Two (2) 6-volt heavy-duty, deep-cycle (GC-2)

Battery Charger: 45 amp output (115 VAC 50/60 Hz input)

Height: (transporting position): 92" (234cm)

Height: (operating position): 142" (360cm)

Weight: 1,560 lbs (min) - 1,960 lbs (max)



SILENT MESSENGER IV

Details for Standard Trailer:

Panel Size A: 60 x 30 (152 cm x 76 cm)

- 16 x 36 pixels (38 mm) / 32 x 72 (19 mm)

Panel Size B: 78" x 30" (198 cm x 76 cm)

- 16x48 pixels (38 mm) / 32x96 (19 mm)

Panel Size C: 78" x 33" (198 cm x 84 cm)

- 18 x 48 pixels (38 mm)

Pixel Size: 1.5" x 1.5"

Solar Array: 80 watts

Batteries: Two (2) 6-volt heavy-duty, deep-cycle (GC-2)

Battery Charger: 45 amp output

Height (stowed): 90" (229 cm)

Height (deployed): 129" (328 cm)

Weight: 1,100 lbs. (500 kg)

*CUSTOMIZABLE WITH ADDITION OPTIONS / COMPLIANT IN ALL PROVINCES

15 LAMP / 25 LAMP ARROW BOARDS

15 Lamp Arrow Board:

Panel Size: 96" x 48" (Type C)

Lamps: LED – 15 or 25

Solar Array: 40 watts

Batteries: Two (2) 6-volt heavy-duty deep cycle (GC-2)

25 Lamp Arrow Board:

Panel Size: 96" x 48" (Type C)

Lamps: LED – 15 or 25

Solar Array: 40 watts

Batteries: Two (2) 6-volt heavy-duty deep cycle (GC-2)

*Truck Mount package available



SOLAR TOWER TRAILERS

This 30 foot tower is an adaptable solar-powered platform that can be outfitted with lights, cameras, sensors, antennas and other communication devices.

Available in: 30 ft (9.14m) & 42 ft (12.80m)

SILENT ADVISOR RADAR SPEED DETECTION & MONITORING

RST-1000

Length Overall (Tow) – 117 in (298cm)

Length Overall (Stowed) – 75 in (191cm)

Width Overall – 56 in. (142cm)

Weight – 1,160 lbs (526kg)


RST-2000

Length Overall – 112 in. (284cm)

Width Overall – 75 in. (190cm)

Weight – 1,160 lbs (526 kg)

Data Collection and Analysis Software Standard.

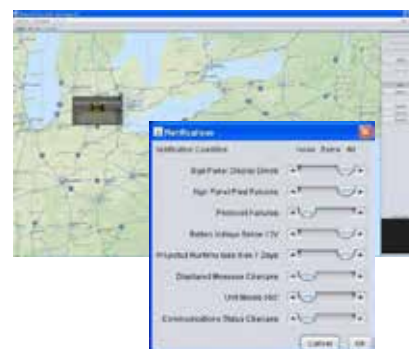

COMMAND CENTER


Command Center is the ultimate tool for traffic safety equipment fleet management. With Command Center, you can manage, monitor and segment your fleet from your office computer (Windows, Linux or Mac).

SILENT RESPONDER INCIDENT RESPONSE TRAILER

FULL SIZE MESSAGE BOARD

Panel Size: 92" x 54" (234 cm x 137 cm) – 27 x 48 pixels 1.75" (4.5 cm) pitch

NTCIP Compatible Solar Powered Message Board with 160 Watt Solar Array, 4 Standard Flooded Batteries, 45A – 120VAC Battery Charger, Hydraulic Surge Brakes, Ten (10) 38" Retro-Reflective Traffic Barrels and Twenty-Five (25) Retro-Reflective Traffic Cones (Model IRT-112-1548)

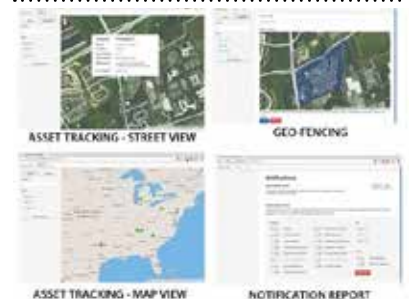

SOLARTRAK

Fleet Tracking, Monitoring and Management Solution

SolarTrak is an internet-based low-cost subscription service that uses telemetry to track, monitor and manage equipment in the field.

PROFESSIONAL LASERS



www.spectra-productivity.com

The Spectra Precision product line consists of exterior laser levels, interior laser levels, grade lasers, line generators and points, optical instruments and more.

Since introducing the worlds first rotating laser level Spectra precision laser has been on the leading edge

of performance within this class of product.

Industry leading warranty programs range from over the counter exchange to 5 year warranties.



BUILT FOR REAL LIFE:

Spectra Lasers are built to withstand severe drops of up to 3 ft (1 m) directly onto concrete, or up to 5 ft (1.5 m) when pushed over on a tripod means less downtime and cost due to damage caused by accidental drop or tip-over.

Visit www.spectra-productivity.com for datasheets & application videos.



LL100
Leveling crew in a case.

Leveling accuracy:
±1/8 in at 100 ft (±3 mm at 30 m)
Operating diameter:
1,000 ft (300 m)



HR320 Receiver: reliable laserometer



LL300
Medium Range
Leveling accuracy:
3/32" /100 ft (2.2 mm per 30 m)
Operating diameter:
400m (1,300ft)



HL450 Receiver: Large Receiver window



LL500
The Industry standard for decades.

Leveling accuracy:
±1.5mm at 30m
(±1/16in at 100ft)
Operating diameter:
500m (1,600ft)



HL700 Receiver: Large 5" receiver window



LL400
Long Range Laser Level

Leveling accuracy:
±1.5mm at 30m
(±1/16in at 100ft)
Operating diameter:
800m (2,600ft)



HL700 Receiver: Large 5" receiver window



GL412/422:
Single/Dual Grade Laser

Leveling accuracy:
± 1.5 mm @ 30 m
(1/16" @ 100 ft)
Grade accuracy/
range: 1.5 mm @ 30 m (1/16" @ 100 ft)
/ -10 to +15% Dual Axes (GL422)
-10 to +15% Single Axis (GL412)
Operating diameter
800 m, 2600 ft (GL422)
600 m, 2000 ft (GL412)



HL700 Receiver: Large 5" receiver window

GL622:
Dual Grade Laser
High Accuracy
UL633:
Universal Laser
Pipe Laser
Dual Grade
Interior Laser

Leveling accuracy:
± 0.5mm, 1/16" @ 100 ft
Grade accuracy: ± 1.0 mm/10 m, 1/8" @ 100 ft
Operating diameter:
800 m (2600 feet) with detector

The UL633 is the most versatile construction laser available. It is the first construction laser to enable the total control of all three axes (X/Y/Z).



HL750 Receiver: Two way laserometer with radio communication / monitoring



OPTICAL INSTRUMENTS

Builders Levels

- Choice of magnification: 24x, 28x or 32x
- Choice of magnetic or air dampened automatic compensators and

Theodolites

- **DET-2 Construction Theodolite** The Spectra Precision® DET-2 is a rugged, cost-effective theodolite designed to give accurate angle measurements in general construction applications.



SECO ACCESSORIES

- Complete range of on the job accessories, including: Bags, Bipods and Tripods, Instrument Clamps, measuring tapes and rulers, prisms and other accessories.



PIPE LASERS

- Pipe Laser is built tough for long lasting performance and reliability.
- Completely waterproof and designed to ensure easy cleanup
- Setup is fast with a full range of mounting accessories available
- Largest range of self leveling pipe laser in the industry.
- Range: -15% to +40%
- Through the Pipe Range: 225 m (750 ft)
- Front / Over the Top Range 150 m (500 ft)



GREEN BEAM LASER

The superior visibility of the green beam is useful for extended working ranges or in bright conditions. The beam stays visible for efficient work in these less than ideal conditions.

Visit us at www.spectra-productivity.com for datasheets & application videos.



HV301G Green Beam rotating interior lasers

- High visibility green beam is four times more visible than standard red beam lasers allowing work at longer distances in brighter conditions
- Automatic self-leveling in horizontal and vertical applications increases productivity with fast setups and minimal training
- Durable construction can withstand tough jobsite conditions
- Temperature compensation for accurate use throughout the day

HV101 Horizontal Vertical Laser

Everything you need for better productivity in acoustical ceiling installation, drywall installation, squaring/layout, interior finishing work and residential or light commercial construction

- Versatile – can be used indoors or outdoors for total productivity
- Automatic self-leveling in both horizontal and vertical planes increases productivity on.



LT56 Universal Layout Tool

- Bright crisp laser lines - extends the working range and are easy to see
- Lithium-Ion batteries provide 25 hour operating time
- Wide fan beam angles
- Bright lines — easy to see even in areas with bright light
- Horizontal plane and 2 vertical planes 90 degrees

Visible Range: 100 ft (30 m)
Range with Receiver: 250 ft (75 m)
Accuracy: ± 1/16 in @ 17 ft (1.5 mm @ 5 m)



5.2XL 5 Point & Cross-line

- Two tools in one horizontal and vertical cross-lines, plus a 5 beam laser pointer
 - Self-leveling for accuracy – beam flashes if it gets knocked or bumped out of level
 - Bright laser points are sharp, focused and easy to mark
- Visible Range: 100 ft (30 m)
Range with Receiver: 250 ft (75 m)
Accuracy: ± 1/16 in @ 17 ft (1.5 mm @ 5 m)



LT20 2 Beam Line Generator

- Self-leveling for quick and accurate setups
 - Bright beams for good visibility even in bright conditions
 - Horizontal only, vertical only or both together
- Visible Range: 100 ft (30 m)
Accuracy: ± 1/16 in @ 17 ft (1.5 mm @ 5 m)



LP50 5 Beam Pointer Pointers are Versatile – replaces a square, plumb bob, level, and optical instrument in the toolbox

Visible Range: 100 ft (30 m)
Accuracy: ± 1/16 in @ 17 ft (1.5 mm @ 5 m)



LP30 3 Beam Pointer

Visible Range: 100 ft (30 m)
Accuracy: ± 1/16 in @ 17 ft (1.5 mm @ 5 m)





185-375CFM ROTARY SCREW COMPRESSORS

Since 1984 Sullivan Palatek has been involved in air compression systems, with a focus on manufacturing high efficiency rotary screw air ends.

Within the 185-375CFM class we offer a narrow and full body size available with on board tool boxes. Many models can be configured with:

- 110% Fluid Containment
- Cold Weather Performance Kit
- Easy access fluid drains plumbed to base rail
- High / Low pressure switch
- Chalwyn positive air shutdown system

MACHINES CONFIGURED FOR YOUR FLEET

Direct from the factory we configure machines to perform best for your specific fleet your requirements. Designed to deliver ROI from day 1.



Model	CFM	PSI	Engine
D185P JD / CA	185	100	John Deere or Cat
D185P2 JD/CA	185	100	John Deere or Cat
D185P3 JD/CA	185	100	John Deere or Cat
D210 PHJD	210	100-150	John Deere

Model	PSI	CFM	Engine
D250 PJD	250	100	John Deere
D300 PDJD	300	200	John Deere
D375PD JD/CA	375	100-150	John Deere or CAT



MACHINES CONFIGURED FOR YOUR FLEET

Powered by Cat and Cummins engines, complete range standard and high pressure machines



Model	CFM	PSI	Engine
D750PH CA/CU	750	100-150	Cat or Cummins
D825P CA/CU	825	100	Cat or Cummins
D825P CU	825	100	Cummins
D900P CA/CU	900	100	Cat or Cummins
D900 PHCU	900	100-150	Cummins

ELECTRIC PORTABLE COMPRESSORS

Electric screw compressors designed and built for portability. Options include: cam lock fittings, fluid containment, fork pockets/ lifting hook, phase rotation protection and more.



- Six versatile models are available in 50 hp (200cfm), 100hp (440cfm), 200hp (750cfm), 250hp (900cfm), 350hp, 400hp (1490cfm), and 450hp (1600cfm) packages. The Sullivan-Palatek ECC packages are designed for many applications from plant air to rugged job sites.





BIG AIR / HIGH PRESSURE PORTABLES

Powered by Cat and Cummins engines, complete range standard and high pressure machines



Model	CFM	PSI	Engine
D950PVH CA/CU	950	350	Cat or Cummins
D1150PVH CA/CU	1150	350	Cat or Cummins
D1300PH CA/CU	1300	100-150	Cat or Cummins
D1600P CA/CU	1600	125	Cat or Cummins
D1600PH CA/CU	1600	100-150	Cat or Cummins
D1800PCA	1800	100	Cat
D1800PMCU	1800	125	Cummins

ELECTRIC INDUSTRIAL COMPRESSORS



The Sullivan-Palatek industrial division manufactures high efficiency electric driven, rotary screw air compressors from 5-400 HP. Our compressors provide more air at higher pressures than competitive machines. We also offer a complete line of refrigeration and desiccant dryers, air filters and condensate management systems.



GUIDE TO CHOOSING

COLD WEATHER OPERATING PERFORMANCE

Designed with low temperature operating conditions in mind

Arctic Spec is a unique option set engineered to perform in extreme cold weather operating conditions.

Variable pitch fans provide optimal cooling in any condition.



TOTAL COST OF OWNERSHIP

Sullivan Palatek air compressors are designed and engineered to exacting performance benchmarks, specific to Canadian industry. Cold weather performance combined with options and features to increase operational efficiency, safety, and performance offer customers incredible ROI.





SERIOUS TOASTER RAPID THAWING

THAW up to 1.6 inches per hour

EASY SET-UP – 2 men can move. Use multiple units in series or custom configuration (circles, squares, tees). No need to clear ice & snow. Fits in a pick-up box

SAFE – NO OPEN FLAME means you can place them anywhere.

SAVE MONEY by exposing utilities.

SAVE WEAR & TEAR using equipment in frost conditions.

STACKABLE multiple units store and transport easily.

LOW MAINTENANCE – minimal moving parts.

AFFORDABLE

- Propane fired
- 120v Low Power Consumption
- Heavy duty steel design, long term performance
- CSA Approved

www.seriousstoaster.com

WHAT'S YOUR THAWING APPLICATION?

Serious Thermal technology is the ideal unit for utility and underground contractors. Fast thawing rates keep crews working in the winter.



Count on it.

www.toro.com

AERATORS

Ride-on and walk behind. Hydrostatic and Mechanical walk behind models available.




SEEDERS & POWER RAKES

Durable, Lightweight and easy to use. Commercial grade products designed rental tough.



TRX TRENCHERS

- 16, 20, and 26HP Kawasaki powered trenchers
- Tracked design for ultimate performance
- Toro intuitive controls
- Zero turn design
- Multiple chain options
- 24"-48" depth

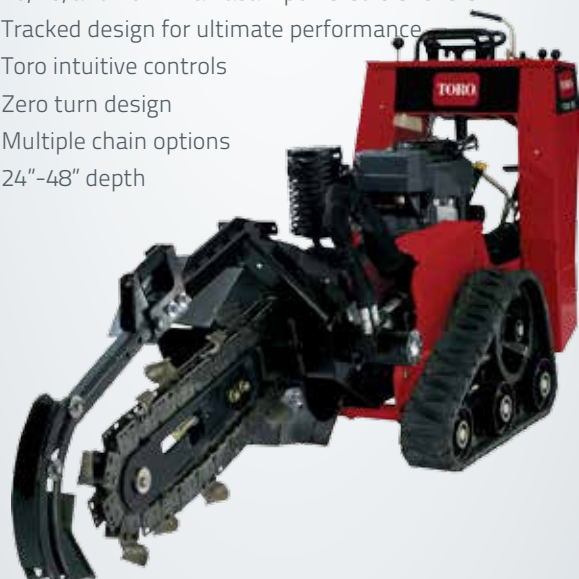



CONCRETE AND MORTAR MIXERS

- Versatile line of mixers available for every job and mixing requirement
- Heavy-duty frame for maximum durability
- Exclusive features that improve productivity and enhance operator control
- Lifetime bearing warranty

Model	Drum Options	Capacity	Engine or Motor
Concrete Mixers			
CM-250E	Wheel barrow and Wheel barrow + pedestal combina- tion available	2 cu. ft. (1/4 bag)	3/4 HP, 120-Volt
CM-658H	Steel Side Dump	6 cu.ft. (1/2 - 1 bag)	Honda GX240
CM-958H	Steel or Plastic: Side Dump or End Dump	9 cu.ft. (1 - 1-1/2 bags)	Honda GX240
CM-1258Y	Steel Side Dump	9 cu.ft. (1 - 1-1/2 bags)	Yanmar L100V
Mortar Mixers			
MM-6 Series	Steel or Plastic	6 cu.ft. (1-1/2 - 2 bags)	Honda GX160 or GX240 + Electric
MM-8 Series	Steel or Plastic	8 cu. ft. (2-1/2 - 3 bags)	Honda GX240 or Electric
MMX-1158H	Steel	11 cu. ft. (3 bags)	Honda GX240
MM-12511H	Steel	12 cu. ft. (3 - 4 bags)	Honda GX340



MUD BUGGY

Extremely versatile to take on more jobs and overcome obstacles around any job site - options available.

MB-1600 Mud Buggy	
Capacity	10 cu. ft.
Max Load Capacity	2,500 lbs dual / 1,875 single
Length	105.5"
Width	46" dual / 33.75" single
Height	45"
Weight	1,370 lbs.
Engine	Honda GX390
Max Speed	7 mph, 11.2 kph
Tub Material	Polyethylene
Fuel Tank Cap.	26.5 litres, 7 gallons
Dumping System	Hydraulic

STUMP GRINDERS

User friendly controls, Excellent visibility, compact, yet powerful design.

- 6.5HP - 38 HP
- Walk behind and tracked models
- Pro-Sharp blade sharpening program on all models



POWER TROWELS

- Precision handling for a smooth concrete finish
- 36" and 46" diameter



36" WALK BEHIND BROOMS

Patented commercial power steering offers effortless maneuverability with the pull of a trigger.



BC25 BRUSH CHIPPER

BC-25 fits through a Standard 36" gate and generates fine mulch.

- Highway towable
- 6" diameter capacity





DINGO COMPACT LOADER

Complete compact utility equipment solution
Simply put, you'll save labor while getting more done.

Hydraulic power supplied where you need it most—to the drive wheels, tracks, or hydraulic attachments.

- 13 to 27 hp engines available.
- Traction to take on hills, mud or sand.
- Gentle on turf – low ground pressure
- Maximize manpower and minimize hand labor.
- Increase productivity and finish jobs faster.



KOHLER
engines

Kubota



DINGO 220

Wheeled unit

20 hp (14.6 kw) Kohler® engine

2-Pump System

2 Ground Speeds

Compact Size

Length:

62" (157.5 cm) , 82.8" (210.3 cm) w/ bucket

Tip Capacity:

1,030 lbs (467.2 kg) w/ 200lb (90.7 kg) operator

Width:

40.5" (102.9 cm) std tires, 35" (88.9 cm) narrow



DINGO 323

Wheeled unit

23 hp (17.2 kw) Kohler® engine

4-Paw® Independent 4-Wheel Drive

2-Pump System

2 Ground Speeds

Length:

62" (157.5cm); 82.8" (210.3 cm) w/ bucket

Tip Capacity:

1030lb. (467.2 kg) w/ 200lb (90.7 kg) operator

Width:

40.5" (109.9cm) std tires



DINGO 320D

Wheeled unit

20 HP (14.9 kw) Kubota Diesel Engine

4-Paw® Independent 4-Wheel Drive

2-Pump System

2 Ground Speeds

Length:

62" (157.5cm); 82.8" (210.3 cm) w/ bucket

Tip Capacity:

1030lb. (467.2 kg) w/ 200lb (90.7 kg) operator

Width:

40.5" (109.9cm) std tires



DINGO 427

Tracked unit

27 hp (20.1 kw) Kohler® engine

Patented, easy-to-use traction control system

34.5" width with bucket

Turf friendly at only 1882 pounds

Length:

92" (233.7 cm)

Tip Capacity:

1530 lbs. (694 kg)

Narrow Track Width:

33.7" (85.6 cm)

Wide Track Width: 41" (104.1 cm)



DINGO 525

Tracked unit

20 hp (14.6 kw) Kohler® engine

2-Pump System

2 Ground Speeds

Compact Size

Length:

62" (157.5 cm) , 82.8" (210.3 cm) w/ bucket

Tip Capacity:

1,030 lbs (467.2 kg) w/ 200lb (90.7 kg) operator

Width:

40.5" (102.9 cm) std tires, 35" (88.9 cm) narrow



Auger Drives and Augers



Trencher / Trench Filler



Forks



Buckets



Cement Bowl / Hydraulic Breaker



Vibratory Plow / Boring



FORWARD PLATES

Patented one-piece base plate design includes an extra large oil reservoir that dissipates the internal heat to entire plate surface.

Patented offset eccentric sheave eliminates belt stress to extend component life.

	FP-2200	FP-3000	FP-4000
Dimensions	13" x 21" (33 cm x 53 cm)	20" x 24" (51 cm x 61 cm)	20" x 24" (51 cm x 61 cm)
Force	2200 lbs (998 kg)	3000 lbs (1,361 kg)	4000 lbs (1,814 kg)
Engine	Honda GX120	Honda GX160	Honda GX160
Max. Productivity	6,500 sq ft/ hr (600 m ² /hour)	10,000 sq ft/hr (930 m ² /hour)	10,000 sq ft/hr (930 m ² /hour)
Speed	Up to 100 ft/min	Up to 100 ft/min	Up to 100 ft/min
Frequency	6,100 vpm	6,000 vpm	5,200 vpm
Weight	140 lbs (64 kg)	205 lbs (93 kg)	215 lbs (98 kg)

REVERSIBLE PLATES

Hard-hitting, maneuverable compaction

Superior compaction in any direction - forward or reverse to keep you productive in confined spaces such as narrow trenches or along walls, foundations, or abutments, Toro's line of reversible plates are ideal for compacting sand, gravel, and mixed soils: hard hitting and maneuverable.



	RP-500	RP-700	RP-1200	RP-1200D	RP-1400D
Dimensions	15.75" x 25" (400 x 600 mm)	20" x 30" (500 x 750 mm)	24" x 35" (600 x 895 mm)	23.6" x 35.2" (600 x 895 mm)	30" x 35" (750 x 900 mm)
Force	4,946 lbs (22 kN)	7,194 lbs (32 kN)	(52 kN)	(52 kN)	14,164 lbs (63 kN)
Engine	Honda GX160	Honda GX200	Honda GX270	Hatz 1B30	Hatz 1B50
Speed	78 ft/min (24 m/min)	72 ft/min (22 m/min)	72 ft/min (22 m/min)	72 ft/min (22 m/min)	65.5 ft/min (20 m/min)
Frequency	6,000vpm, 100Hz	5,400vpm, 90Hz	75 Hz	75 Hz	70 Hz
Weight	265 lbs. (120 kg)	463 lbs (210 kg)	728 lbs (330 kg)	772 lbs (350 kg)	1,014 lbs (460 kg)



TR-34D TRENCH ROLLER

Dimensions: 19.7" (50 cm) drum diameter
34" (86 cm) drum width

Force: 15,706 lbs (7,124 kg)

Engine: Hatz 2G40

Maximum Productivity: 10,798 ft²/hour
(1,003 m²/hour)

Speeds: up to 136 ft/min

Frequency: 2,000 vpm

Weight: 3,100 lbs (1,406 kg)

RAMMERS

Lightweight and durable

High impact poly shoe with a steel reinforced base plate takes more abuse. Heavy duty rubber shock mounts cushion vibration to the operator for greater comfort. See-through polyethylene fuel tank allows for quick fuel checks.



	VR-2650	VR-3100	VR-3500
Dimensions	10" x 13" (25 cm x 33 cm)	11" x 13" (28 cm x 33 cm)	11" x 13" (28 cm x 33 cm)
Force	2,650 lbs (1,202 kg)	3,100 lbs (1,406 kg)	3,500 lbs (1,587 kg)
Engine	Honda GX100	Honda GX100	Honda GX120
Max Productivity	3,500 sq ft/hr	3,575 sq ft/hr	3,575 sq ft/hr
Max. BPM	727	690	655
Speed	Up to 70 ft/min	Up to 70 ft/min	Up to 70 ft/min
Weight	132 lbs (60 kg)	144 lbs (65 kg)	154 lbs (70 kg)

HONDA
ENGINES





www.toku-america.com



HYDRAULIC HAMMER SOLUTIONS

Toku Pneumatic, was founded in Japan and has been in business since 1937, offering pneumatic and hydraulic products to over 52 countries around the world.

- Open flow design
- Made in Japan quality
- Accumulator free design
- Low Operating Costs: Featuring only two moving parts and few seals, Toku breakers offer more "up-time" and simple, in the field maintenance.

HAVE A HYDRAULIC HAMMER APPLICATION?

Help us understand your hammer requirements. Off the shelf systems for excavators, skid steers, back hoes and more.



www.wylie.com

500 GALLON & 1025 GALLON WATER TRAILERS

Transport Canada Approved Trailers - Electric Brakes
4 hp Honda Engine w/2", Koshin Pump
25' Discharge Fire Hose w/Fire Nozzle
Spray Bar Covers 25' Swath
Diamond Tread Fenders
Lights And Safety Chain



20' Suction Fill Hose
Bottom Quick Fill
Opt. 25' Rubber Hose w/Trigger Gun



The fire hose and nozzle quick couples to either side of the "Express" Water Wagon for easy use.

- ST225/75D15-D Tires
- 6" Channel Iron Frame
- 5 Year Tank Warranty
- Spray Bar covers up to 25" with TeeJet brass



NOTES:

KEEP THE IMPORTANT STUFF HERE

[illegible]

